


## Bronze (Copper-Tin) BB60 Plus Ecobronze

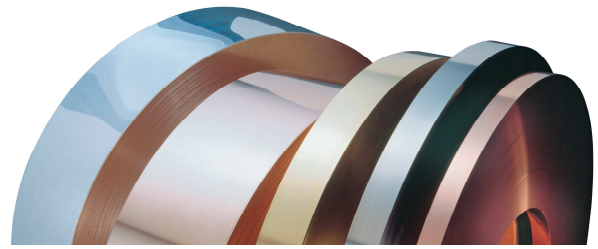

Material Designation	
DIN-EN Symbol	(CuSn6+)
DIN-EN	CW452K
UNS	C51900
JIS	C5191

Physical Properties		
Electrical conductivity soft	8.1	MS/m
Thermal conductivity	66	W/(m·K)
Thermal expansion coefficient **	18	10 <sup>-6</sup> /K
Density	8.8	g/cm <sup>3</sup>
Modulus of elasticity	115	GPa = kN/mm <sup>2</sup>

\* Reference values at room temperature

\*\* Between 20 and 300 °C

Nominal Composition (mass content in %)	
Cu	Balance
Sn	6
Zn	< 0.2
Ni	< 0.2
Fe	< 0.1
Pb	< 0.005
P	0.03 - 0.35
Other	< 0.1

### Typical Applications

- Connectors for electrical engineering, electronics and automotive technology
- Stamped-bent parts
- Contact springs
- Leaf springs for relays
- Slide bearings
- Slide bars

### About The Alloy

The Ecobronze BB60 Plus is a modified 6 % tin bronze which is distinguished by a very fine structure with considerably higher strength and elongation and a high electrical conductivity. It is used for miniaturized connectors and current-carrying springs in contacts.


Among the 4 to 8 % tin bronzes BB60 Plus exhibits an intermediate electrical conductivity. Regarding the strength it reaches the level of a standard 8 % bronze.

The alloy is registered with the U.S. EPA as Antimicrobial and with respect to Pb and Cd meets the OEKO-TEX Standard 100.

Mechanical Properties *)			
Temper condition		H04S R 590S H 190S	H06S R 650S H 200S
Tensile strength in N/mm <sup>2</sup>		590 - 690	650 - 750
0.2 % yield Strength in N/mm <sup>2</sup>		> 540	620
Elongation A <sub>LS0</sub> %		> 12	> 8
Vickers hardness HV		190 - 220	200 - 230
Electrical conductivity in % IACS		13	13
Minimum radius of the bending mandrel for 90° bend and strip thickness s with a thickness/width ratio of < 10			
0.10 ≤ s ≤ 0.25 mm	transverse	0 x s	0.5 x s
	parallel	0 x s	1.5 x s

\*) Reference values

**Bronze (Copper-Tin)**  
**BB60 Plus**  
**Ecobronze**

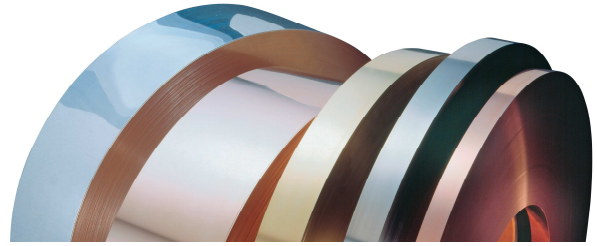

Processing Instructions	
Cold forming properties	very good
Machinability	sufficient
Electroplating properties	very good
Hot-dip tinning properties	very good
Soldering	very good
Resistance welding	good
Gas shielded arc welding	good
Laser welding	very good

Available Dimensions
Bright pre-rolled strips 1 to 2.5 mm
Precision strip thickness from 0.05 to 1.2 mm
Strip width from 3.0 to 600 mm, but at least 10 times of the strip thickness
Other widths available on request.

Available Versions
Coils with standard outer diameters of 1200 mm
Strips in reel form with coil weight of up to 1500 kg
Multipancake up to 2.5 t
Hot-dip tinned strips
Profiled strips
Electroplated strips (tin, nickel)

Your Local Contact Person	
Europe	Asia
<p><b>SUNDWIGER</b> Messingwerk</p> <p>Sundwiger Messingwerk GmbH</p> <p>Hönnetalstraße 110 58675 Hemer Deutschland Tel. +49 2372 661-100 Fax +49 2372 661-48100 E-Mail: sales-sundwig@sundwiger-mw.com www.sundwiger-mw.com</p>	<p><b>SUNDWIGER</b> Messingwerk</p> <p>Diehl Metall (Shenzhen) Co. Ltd.</p> <p>5F, Block 25, Shatoujiao Free Trade Zone 518081 Shenzhen P.R. of China Tel. +86 755 2235 7466 Fax +86 755 25260974 E-Mail: sales@sundwiger-mw.com.cn www.sundwiger-mw.com</p>

The information given in this material data sheet, which in any case provides no guarantee of particular characteristics, has been compiled to the best of our knowledge but is given without any obligation on our part. Our liability is determined solely by the individual contract terms, in particular by our general conditions of sale.

We reserve the right to make alterations especially where necessitated by technical developments or changes in availability. Please ask for the latest edition of this material data sheet.